

**GLAKOR**<sup>®</sup>  
INTELLIGENT CABLE GLANDS



COMPLETE SOLUTIONS

**CABLE GLANDS**

<b>CABLE GLANDS IP68</b>	<b>4</b>
METRIC STAINLESS STEEL AISI 304 AND 316 CABLE GLANDS IP68	5
METRIC EMC STAINLESS STEEL AISI 304 CABLE GLANDS IP68	6
METRIC EMC STAINLESS STEEL AISI 316 CABLE GLANDS IP68	7
METRIC NICKEL-PLATED BRASS CABLE GLANDS IP68	8
METRIC EMC NICKEL-PLATED BRASS CABLE GLANDS IP68	9
METRIC AND PG POLYAMIDE CABLE GLANDS IP68	10
METRIC AND PG STAINLESS STEEL AISI 304 PLUG IP68	11
METRIC AND PG STAINLESS STEEL AISI 316 PLUG IP68	12
METRIC AND PG NICKEL-PLATED BRASS PLUG IP68	13
METRIC AND PG POLYAMIDE PLUG IP68	14
VENTILATION PLUG IP68	15

<b>CABLE GLANDS EX D/E ATEX</b>	<b>16</b>
CABLE GLANDS UNARMoured EX D IP66 - IP68	17
CABLE GLANDS UNARMoured EX E IP66 - IP68	17
DOUBLE COMPRESSION CABLE GLANDS ARMoured EX D/E IP66 - IP68	18
POLYAMIDE CABLE GLANDS EX/E IP68	19
CABLE GLANDS ATEX INCREASED SECURITY POLYAMIDE EX/I IP68	20
STOPPER PLUG EX D/E IP66 - IP68	21
STOPPER PLUG POLYAMIDE EX/E IP66	22
ADAPTER REDUCER EX D/E IP66 - IP68	23
ADAPTER ENLARGER EX D/E IP66 - IP68	24
REDUCER EX D/E IP66 - IP68	25
ENLARGER EX D/E IP66 - IP68	26
AUTOMATIC BREATHER AND DRAINAGE HAZARDOUS AREA VALVES ATEX IP66	27
SHROUD IP66 - IP68	28
EARTH TAG	28



INTELLIGENT CABLE GLANDS

Paso del Prao, 6. 01320 Oyón (Álava). Spain  
+34 945 601 381

comercial@glakor.com | www.cableglandsfast.com | www.glakor.com



INTELLIGENT CABLE GLANDS

## CONTACT US

Confidentiality, reliability & quality

[www.glakor.com](http://www.glakor.com)

[www.cableglandsfast.com](http://www.cableglandsfast.com)

[comercial@glakor.com](mailto:comercial@glakor.com)

+34 945 601 381

## WE PUT AT YOUR DISPOSAL

We offer over **45 years** providing solutions to demanding customers who require very specific characteristics and behaviour according to the sector and their needs

## WHEREVER YOU GO

We are committed to working closely with our customers, providing them with **exceptional service** and offering an advanced and extensive range of products with very competitive prices

## HIGH STANDARD OF QUALITY AND SERVICES

We only use materials provided by companies who offer the very **highest quality**, suitable and certified products. Our success is due to **top quality** assurance: ISO 9001, SGS, UL, TÜV, ISO 14000 and OHSAS 18001

## PLEASE CONTACT OUR TECHNICAL SALES DEPARTMENT

A team of professionals with high experience and ability to solve all your queries



# IP68 CABLE GLANDS



**We have the Largest Stock  
Cable Glands in the Market,  
Next Day Delivery Service**

**Glakor cable glands and the plugs IP68** are suitable for the passage, blocking the passage, compression and wire binding between two compartments, such as junction boxes or devices requiring sealing. With a wide variety and the best quality, we offer a customized solution for each client. Available in **stainless steel, nickel-plated brass and fiberglass-reinforced polyamide** and EMC shields with protection up to IP68.



**FOR MORE INFORMATION CLICK HERE**



# STAINLESS STEEL CABLE GLANDS


Stainless steel cable glands are placed over other materials. They are corrosion resistant, more robust and durable than any other materials used in the construction field.

They help you to save money thanks to their low maintenance and their long life (over 20-30 years). The aesthetic aspect is also remarkable, as they have great quality and presence.



## METRIC STAINLESS STEEL AISI 304 AND 316 CABLE GLANDS IP68





- Material:
  - Stainless steel AISI 304
  - Stainless steel AISI 316
- Thread: Metric
- Sealing ring: NBR
- Stainless steel lock nut included
- ULtraviolet (UV) resistance
- Protection: IP68
- Temperature resistance:
  - -40°C to +100°C
  - -40°C to +120°C short time
- Supports: Water, dust, salt, acids, alcohol and oils



REFERENCES METRIC STAINLESS STEEL AISI 304 CABLE GLANDS

METRIC STAINLESS STEEL AISI 304 CABLE GLANDS IP68	SIZE	CABLE RANGE		THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	LENGTH OF THE ASSEMBLY GL + H (mm)	 (mm)	 MINIMUM
		≥	≤					
DVCG.M12.S4	M12x1,5	3	6,5	12	7	19	14	10
DVCG.M16.S4	M16x1,5	4	8	16	8	20	18	10
DVCG.M20.S4	M20x1,5	8	12	20	8	22	22	10
DVCG.M25.S4	M25x1,5	12	16	25	9	27	27	10
DVCG.M32.S4	M32x1,5	15	22	32	10	29	35	5
DVCG.M40.S4	M40x1,5	18	25	40	11	31	40/45	5
DVCG.M48.S4	M48x1,5	25	32	50	11	37	50/52	2
DVCG.M50.S4	M50x1,5	32	38	50	12	37	50/55	2
DVCG.M63.S4	M63x1,5	37	44	63	13	38	64/68	1
DVCG.M75.S4	M75x2	42	52	75	15	42	78	1
DVCG.M80.S4	M80x2	50	62	80	15	45	86/88	1
DVCG.M88.S4	M88x2	60	70	88	15	45	98	1
DVCG.M100.S4	M100x2	70	80	100	15	45	110	1

REFERENCES METRIC STAINLESS STEEL AISI 316 CABLE GLANDS

METRIC STAINLESS STEEL AISI 316 CABLE GLANDS IP68	SIZE	CABLE RANGE		THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	LENGTH OF THE ASSEMBLY GL + H (mm)	 (mm)	 MINIMUM
		≥	≤					
DVCG.M12.S6	M12x1,5	3	6,5	12	7	19	14	10
DVCG.M16.S6	M16x1,5	4	8	16	8	20	18	10
DVCG.M20.S6	M20x1,5	8	12	20	8	22	22	10
DVCG.M25.S6	M25x1,5	12	16	25	9	27	27	10
DVCG.M32.S6	M32x1,5	15	22	32	10	29	35	5
DVCG.M40.S6	M40x1,5	18	25	40	11	31	40/45	5
DVCG.M48.S6	M48x1,5	25	32	50	11	37	50/52	2
DVCG.M50.S6	M50x1,5	32	38	50	12	37	50/55	2
DVCG.M63.S6	M63x1,5	37	44	63	13	38	64/68	1
DVCG.M75.S6	M75x2	42	52	75	15	42	78	1
DVCG.M80.S6	M80x2	50	62	80	15	45	86/88	1
DVCG.M88.S6	M88x2	60	70	88	15	45	98	1
DVCG.M100.S6	M100x2	70	80	100	15	45	110	1

## METRIC EMC STAINLESS STEEL AISI 304 CABLE GLANDS IP68

Modern technologies and modern products are becoming more and more efficient and complex. The demands on general safety and functional reliability are constantly increasing. More electromagnetic interlinks are taking place as a result of the rising number of electronic appliances. As a result, the "EMC Law" was passed. Since 01.01.1996 there is an EU Directive of Electromagnetic Compatibility 2014/30/UE. In the EMC directive, the following objectives are agreed upon:

- A harmonised and acceptable level of protection
- Electronic devices must not disturb one another
- Devices must have their own adequate level of intrinsic immunity to electromagnetic disturbances.



The following requirements on an EMC cable and wiring entry points result from the EMC Law and diverse VDE (Association for Electrical,

Electronic & Information Technologies) and ZVEI (Zentralverband Elektrotechnikund Elektronikindustrie E.V.) Directives:

1. The connection of the cable shield/housing must have low ohmic and inductive resistance.
2. Ring-shaped 360° contacting (low ohmic resistance)
3. Short shield (low inductive resistance)
4. Low resistance must be ensured for all environmental influences (dust, humidity, temperature)
5. Large contact surface between the cable shield and the screw connection in order to avoid corrosion and guarantee a good conductive connection. To test the shielding performance of an EMC screw connection, one must view the system screw connection, housing and cables. The obtained measuring result is largely influenced by the shielding effectiveness of the cable used for testing.



- Material: Stainless steel AISI 304
- Thread: Metric
- Sealing ring: NBR
- Stainless steel lock nut included
- Ultraviolet (UV) resistance
- Protection: IP68 - 5 bar
- Certificates: CE, ROHS, REACH
- Temperature resistance:
  - -40°C to +100°C

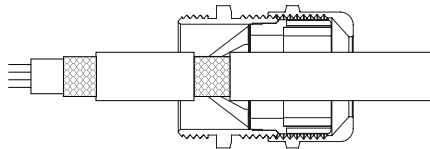



REFERENCES METRIC EMC STAINLESS STEEL AISI 304 CABLE GLANDS

METRIC EMC STAINLESS STEEL AISI 304 CABLE GLANDS	SIZE	CABLE RANGE		THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	LENGTH OF THE ASSEMBLY GL + H (mm)	 (mm)	 MINIMUM
		≥	≤					
DVCG.M12.S4.EMC	M12x1,5	3	6,5	12	7	19	14	50
DVCG.M16.S4.EMC	M16x1,5	4	8	16	8	20	18	10
DVCG.M20.S4.EMC	M20x1,5	6	12	20	8	22	22	10
DVCG.M25S.S4.EMC	M25x1,5	10	14	25	9	25	24/27	10
DVCG.M25.S4.EMC	M25x1,5	13	18	25	9	27	27/30	10
DVCG.M32.S4.EMC	M32x1,5	15	22	32	10	29	35	5
DVCG.M40.S4.EMC	M40x1,5	18	25	40	11	31	40/45	5
DVCG.M48.S4.EMC	M48x1,5	25	33	48	11	37	50/52	2
DVCG.M50.S4.EMC	M50x1,5	32	38	50	12	37	50/55	2
DVCG.M63.S4.EMC	M63x1,5	37	44	63	13	38	64/68	1



## METRIC EMC STAINLESS STEEL AISI 316 CABLE GLANDS IP68

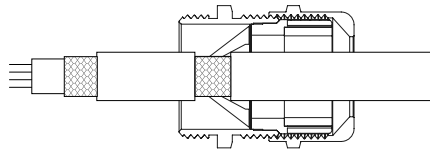

- Material: Stainless steel AISI 316
- Thread: Metric
- Sealing ring: NBR
- Stainless steel lock nut included
- Ultraviolet (UV) resistance
- Protection: IP68 - 5 bar
- Certificates: CE, ROHS, REACH
- Temperature resistance:
  - -40°C to +100°C



REFERENCES METRIC EMC STAINLESS STEEL AISI 316 CABLE GLANDS

METRIC EMC STAINLESS STEEL AISI 316 CABLE GLANDS	SIZE	CABLE RANGE		THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	LENGTH OF THE ASSEMBLY GL + H (mm)	 (mm)	 MINIMUM
		≥	≤					
DVCG.M12.S6.EMC	M12x1,5	3	6,5	12	7	19	14	50
DVCG.M16.S6.EMC	M16x1,5	4	8	16	8	20	18	10
DVCG.M20.S6.EMC	M20x1,5	6	12	20	8	22	22	10
DVCG.M25.S6.EMC	M25x1,5	12	16	25	9	27	27/30	10
DVCG.M25.S6.EMC	M32x1,5	15	22	32	10	29	35	5
DVCG.M32.S6.EMC	M40x1,5	18	25	40	11	31	40/45	5
DVCG.M40.S6.EMC	M48x1,5	25	33	48	11	37	50/52	2
DVCG.M48.S6.EMC	M50x1,5	32	38	50	12	37	55/57	2
DVCG.M50.S6.EMC	M63x1,5	37	44	63	13	38	64/68	1
DVCG.M63.S6.EMC	M63x1,5	37	44	63	13	38	64/68	1




# NICKEL-PLATED BRASS CABLE GLANDS

Nickel-plated cable glands are made of electrically conductive metal. They are resistant to corrosion and react in aggressive media.



## METRIC NICKEL-PLATED BRASS CABLE GLANDS IP68



- Material: Nickel-plated brass
- Thread: Metric
- Sealing ring: NBR
- Nickel-plated brass lock nut included
- Ultraviolet (UV) resistance
- Protection: IP68
- Temperature resistance:
  - -40°C to +100°C
  - -40°C to +120°C short time
- Supports: Water, dust, salt, acids, alcohol and oils



REFERENCES METRIC NICKEL-PLATED BRASS CABLE GLANDS

METRIC NICKEL-PLATED BRASS CABLE GLANDS	SIZE	CABLE RANGE		THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	LENGTH OF THE ASSEMBLY GL + H (mm)	 (mm)	 MINIMUM
		≥	≤					
DVCG.M12.ON	M12x1,5	3	6,5	12	7	19	14	50
DVCG.M16.ON	M16x1,5	4	8	16	8	20	18	50
DVCG.M20.ON	M20x1,5	6	12	20	8	22	22	50
DVCG.M25.ON	M25x1,5	12	16	25	9	27	27	50
DVCG.M32.ON	M32x1,5	15	22	32	10	29	35	25
DVCG.M40.ON	M40x1,5	18	25	40	11	31	40/45	10
DVCG.M48.ON	M48x1,5	25	32	50	11	37	50/52	10
DVCG.M50.ON	M50x1,5	32	38	50	12	37	50/55	10
DVCG.M63.ON	M63x1,5	37	44	63	13	38	64/68	10
DVCG.M75.ON	M75x2	42	52	75	15	42	78	5
DVCG.M80.ON	M80x2	50	62	80	15	45	86/88	5
DVCG.M88.ON	M88x2	60	70	88	15	45	98	5
DVCG.M100.ON	M100x2	70	80	100	15	45	110	5





## METRIC EMC NICKEL-PLATED BRASS CABLE GLANDS IP68

Modern technologies and modern products are becoming more and more efficient and complex. The demands on general safety and functional reliability are constantly increasing. More electromagnetic interlinks are taking place as a result of the rising number of electronic appliances. As a result, the "EMC Law" was passed. Since 01.01.1996 there is an EU Directive of Electromagnetic Compatibility 2014/30/UE. In the EMC Directive, the following objectives are agreed upon:

- A harmonised and acceptable level of protection
- Electronic devices must not disturb one another
- Devices must have their own adequate level of intrinsic immunity to electromagnetic disturbances.



The following requirements on an EMC cable and wiring entry points result from the EMC Law and diverse VDE (Association for Electrical,

Electronic & Information Technologies) and ZVEI (Zentralverband Elektrotechnikund Elektronikindustrie e.V.) Directives:



1. The connection of the cable shield/housing must have low ohmic and inductive resistance.
2. Ring-shaped 360° contacting (low ohmic resistance)
3. Short shield (low inductive resistance)
4. Low resistance must be ensured for all environmental influences (dust, humidity, temperature)
5. Large contact surface between the cable shield and the screw connection in order to avoid corrosion and guarantee a good conductive connection. To test the shielding performance of an EMC screw connection, one must view the system screw connection, housing and cables. The obtained measuring result is largely influenced by the shielding effectiveness of the cable used for testing

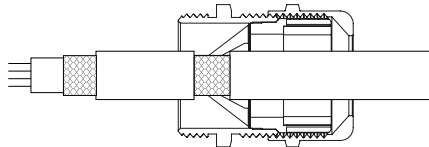

- Material: Nickel-plated brass
- Thread: Metric
- Sealing ring: NBR
- Nickel-plated brass lock nut included
- Ultraviolet (UV) resistance
- Protection: IP68 - 5 bar
- Certificates: CE, ROHS, REACH
- Temperature resistance:
  - -40°C to +100°C



REFERENCES METRIC EMC NICKEL-PLATED BRASS CABLE GLANDS

METRIC EMC NICKEL-PLATED BRASS CABLE GLANDS	SIZE	CABLE RANGE		THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	LENGTH OF THE ASSEMBLY GL + H (mm)	 (mm)	 MINIMUM
		≥	≤					
DVCG.M12.ON.EMC	M12x1,5	3	6,5	12	7	19	14	50
DVCG.M16.ON.EMC	M16x1,5	4	8	16	8	20	18	10
DVCG.M20.ON.EMC	M20x1,5	6	12	20	8	22	22	10
DVCG.M25S.S6.EMC	M25x1,5	10	14	25	9	25	24/27	10
DVCG.M25.ON.EMC	M25x1,5	13	18	25	9	27	27/30	10
DVCG.M32.ON.EMC	M32x1,5	15	22	32	10	29	35	5
DVCG.M40.ON.EMC	M40x1,5	18	25	40	11	31	40/45	5
DVCG.M48.ON.EMC	M48x1,5	25	33	48	11	37	50/52	2
DVCG.M50.ON.EMC	M50x1,5	32	38	50	12	37	50/55	2
DVCG.M63.ON.EMC	M63x1,5	37	44	63	13	38	64/68	1

# POLYAMIDE CABLE GLANDS


Polyamide cable glands are manufactured with a semi-crystalline thermoplastic that has good mechanical strength and high impact strength.

These cable glands have good sliding behavior and good wear resistance; they are resistant to aging under high temperatures and for extended periods of time. They also offer high strength and rigidity, even at low temperatures. They resist intrinsic ignition and have excellent dielectric properties and chemical resistance. High resistance to chemical materials like gasoline and fat at the best price.



## METRIC AND PG POLYAMIDE CABLE GLANDS IP68





- Material: Polyamide PA66
- Thread:
  - Metric
  - PG
- Sealing ring: NBR
- Polyamide lock nut included
- Color: black RAL 9005
- Ultraviolet (UV) resistance
- Protection: IP68
- Temperature resistance:
  - -40°C to +100°C
  - -40°C to +120°C short time



REFERENCES METRIC POLYAMIDE CABLE GLANDS

METRIC POLYAMIDE CABLE GLANDS	SIZE	CABLE RANGE		THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	 (mm)	 MINIMUM
		≥	≤				
DVCG.M12.NY	M12x1,5	3	6,5	12	8	16	50
DVCG.M16.NY	M16x1,5	4	8	16	8	19	50
DVCG.M20.NY	M20x1,5	6	12	20	10	24	50
DVCG.M25.NY	M25x1,5	12	16	25	10	33	50
DVCG.M32.NY	M32x1,5	16	21	32	11	35	25
DVCG.M40.NY	M40x1,5	22	32	40	14	52	10
DVCG.M50.NY	M50x1,5	32	38	50	14	60	5
DVCG.M63.NY	M63x1,5	37	44	63	15	64	5

REFERENCES PG POLYAMIDE CABLE GLANDS \*

PG POLYAMIDE CABLE GLANDS *	SIZE	CABLE RANGE		THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	 (mm)	 MINIMUM
		≥	≤				
DVCG.PG7.NY*	PG7	3	6,5	12,5	8	16	50
DVCG.PG9.NY*	PG9	4	8	15,2	8	19	50
DVCG.PG11.NY*	PG11	5	10	18,6	8	22	50
DVCG.PG13,5.NY*	PG13,5	6	12	20,4	10	24	50
DVCG.PG16.NY*	PG16	10	14	22,5	10	27	50
DVCG.PG21.NY*	PG21	13	18	28,3	10	33	25
DVCG.PG29.NY*	PG29	18	25	37	12	42	25
DVCG.PG36.NY*	PG36	22	32	47	14	52	5
DVT.PG42.NY*	PG42	32	38	54	14	60	5
DVT.PG48.NY*	PG48	37	44	59,3	15	64	5
DVT.PG63.NY*	PG63	42	50	71	28	77	5

\* PG cable glands available upon request


# STOPPER PLUGS

Stopper plug is designed for use from the outside of the enclosure to permanently or temporarily close any unused entries. We have stainless steel plugs, nickel-plated brass and polyamide.

## METRIC AND PG STAINLESS STEEL AISI 304 PLUG IP68



- Material: Stainless steel AISI 304
- Thread:
  - Metric
  - PG
- Sealing ring: NBR
- Stainless steel lock nut included
- ULtraviolet (UV) resistance
- Protection: IP68
- Temperature resistance: -40°C +105°C
- Supports:
  - Water
  - Dust
  - Salt
  - Acids
  - Alcohol
  - Oils



REFERENCES METRIC STAINLESS STEEL AISI 304 PLUG

METRIC STAINLESS STEEL AISI 304 PLUG	SIZE	THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	J (mm)	D (mm)	MINIMUM
DVT.M12.S4	M12	12	5	8	14	10
DVT.M16.S4	M16	16	6	9	17	10
DVT.M20.S4	M20	20	6,5	9,5	22	10
DVT.M25.S4	M25	25	6,5	10	27	10
DVT.M32.S4	M32	32	7	11	35	5
DVT.M40.S4	M40	40	8	13	43	5
DVT.M50.S4	M50	50	9	15	55	2
DVT.M63.S4	M63	63	10	16	66	2

REFERENCES PG STAINLESS STEEL AISI 304 PLUG \*


PG STAINLESS STEEL AISI 304 PLUG *	SIZE	THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	J (mm)	D (mm)	MINIMUM
DVT.PG7.S4*	PG7	7	5	8	14	10
DVT.PG9.S4*	PG9	9	6	9	17	10
DVT.PG11.S4*	PG11	11	6	9	20	10
DVT.PG13,5.S4*	PG13,5	13,5	6,5	9,5	22	10
DVT.PG16.S4*	PG16	16	6,5	9,5	24	10
DVT.PG21.S4*	PG21	21	7	11	30	10
DVT.PG29.S4*	PG29	29	8	12	39	5
DVT.PG36.S4*	PG36	36	9	15	50	5
DVT.PG42.S4*	PG42	42	10	16	57	2
DVT.PG48.S4*	PG48	48	10	16	64	2

\* PG plugs available upon request

## METRIC AND PG STAINLESS STEEL AISI 316 PLUG IP68



- Material: Stainless steel AISI 316
- Thread:
  - Metric
  - PG
- Sealing ring: NBR
- Stainless steel lock nut included
- ULtraviolet (UV) resistance
- Protection: IP68
- Temperature resistance: -40°C +105°C
- Supports:
  - Water
  - Dust
  - Salt
  - Acids
  - Alcohol
  - Oils



REFERENCES METRIC STAINLESS STEEL AISI 316 PLUG


METRIC STAINLESS STEEL AISI 316 PLUG	SIZE	THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	J (mm)	D (mm)	MINIMUM
DVT.M12.S6	M12	12	5	8	14	10
DVT.M16.S6	M16	16	6	9	17	10
DVT.M20.S6	M20	20	6,5	9,5	22	10
DVT.M25.S6	M25	25	6,5	10	27	10
DVT.M32.S6	M32	32	7	11	35	5
DVT.M40.S6	M40	40	8	13	43	5
DVT.M50.S6	M50	50	9	15	55	2
DVT.M63.S6	M63	63	10	16	66	2

REFERENCES PG STAINLESS STEEL AISI 316 PLUG \*


PG STAINLESS STEEL AISI 316 PLUG *	SIZE	THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	J (mm)	D (mm)	MINIMUM
DVT.PG7.S6*	PG7	7	5	8	14	10
DVT.PG9.S6*	PG9	9	6	9	17	10
DVT.PG11.S6*	PG11	11	6	9	20	10
DVT.PG13,5.S6*	PG13,5	13,5	6,5	9,5	22	10
DVT.PG16.S6*	PG16	16	6,5	9,5	24	10
DVT.PG21.S6*	PG21	21	7	11	30	10
DVT.PG29.S6*	PG29	29	8	12	39	5
DVT.PG36.S6*	PG36	36	9	15	50	5
DVT.PG42.S6*	PG42	42	10	16	57	2
DVT.PG48.S6*	PG48	48	10	16	64	2

\* PG plugs available upon request

## METRIC AND PG NICKEL-PLATED BRASS PLUG IP68



- Material: Nickel-plated brass
- Thread:
  - Metric
  - PG
- Sealing ring: NBR
- Nickel-plated brass lock nut included
- Ultraviolet (UV) resistance
- Protection: IP68
- Temperature resistance: -40°C +105°C
- Supports:
  - Water
  - Dust
  - Salt
  - Acids
  - Alcohol
  - Oils



REFERENCES METRIC NICKEL-PLATED BRASS PLUG

METRIC NICKEL-PLATED BRASS PLUG	SIZE	THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	J (mm)	D (mm)	MINIMUM
DVT.M12.ON	M12	12	5	8	14	50
DVT.M16.ON	M16	16	6	9	17	50
DVT.M20.ON	M20	20	6,5	9,5	22	50
DVT.M25.ON	M25	25	6,5	10	27	50
DVT.M32.ON	M32	32	7	11	35	25
DVT.M40.ON	M40	40	8	13	43	25
DVT.M50.ON	M50	50	9	15	55	10
DVT.M63.ON	M63	63	10	16	66	5

REFERENCES PG Nickel-plated brass PLUG \*


PG NICKEL-PLATED BRASS PLUG *	SIZE	THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	J (mm)	D (mm)	MINIMUM
DVT.PG7.ON*	PG7	7	5	8	14	50
DVT.PG9.ON*	PG9	9	6	9	17	50
DVT.PG11.ON*	PG11	11	6	9	20	50
DVT.PG13.5.ON*	PG13,5	13,5	6,5	9,5	22	50
DVT.PG16.ON*	PG16	16	6,5	9,5	24	50
DVT.PG21.ON*	PG21	21	7	11	30	50
DVT.PG29.ON*	PG29	29	8	12	39	25
DVT.PG36.ON*	PG36	36	9	15	50	25
DVT.PG42.ON*	PG42	42	10	16	57	10
DVT.PG48.ON*	PG48	48	10	16	64	10

\* PG plugs available upon request

## METRIC AND PG POLYAMIDE PLUG IP68



- Material: Polyamide PA66
- Thread:
  - Metric
  - PG
- Sealing ring: NBR
- Polyamide lock nut included
- Color: Black RAL 9005
- Ultraviolet (UV) resistance
- Protection: IP68
- Temperature resistance:
  - -40°C to +100°C
  - -40°C to +120°C short time



REFERENCES METRIC POLYAMIDE PLUG

METRIC POLYAMIDE PLUG	SIZE	THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	H (mm)	D (mm)	MINIMUM
DVT.M12.NY	M12	12	8,5	12,5	15	100
DVT.M16.NY	M16	16	8,5	13	19	100
DVT.M20.NY	M20	20	9	13	25	100
DVT.M25.NY	M25	25	10,5	15,5	30	100
DVT.M32.NY	M32	32	10,5	16	38	100
DVT.M40.NY	M40	40	11,5	16	46	50
DVT.M50.NY	M50	50	13,5	18	56	50
DVT.M63.NY	M63	63	14	19	68	25

REFERENCES PG POLYAMIDE PLUG \*

PG POLYAMIDE PLUG *	SIZE	THREAD DIAMETER AG (mm)	LENGTH OF THE THREAD GL (mm)	H (mm)	D (mm)	MINIMUM
DVT.PG7.NY*	PG7	12,5	8,5	12,5	15	100
DVT.PG9.NY*	PG9	15,2	8,5	13	19	100
DVT.PG11.NY*	PG11	18,6	9,	13	22	100
DVT.PG13.5.NY*	PG13,5	20,4	9,	13	25	100
DVT.PG16.NY*	PG16	22,5	10,5	15	27	100
DVT.PG21.NY*	PG21	28,3	10,5	15,	33	100
DVT.PG29.NY*	PG29	37	11,5	16	44	50
DVT.PG36.NY*	PG36	47	13,5	18	55	50
DVT.PG42.NY*	PG42	54	13,5	18,5	62	25
DVT.PG48.NY*	PG48	59,3	14,5	19,5	68	25

\* PG plugs available upon request

# VENTILATION PLUG IP68


## VENTILATION PLUG IP68

Ventilation plug: (polyamide, Nickel-plated brass and stainless steel) reduce the adverse effects of humidity in the environment circulation



by preventing pressure increase inside the enclosure and limiting temperature increase through air.

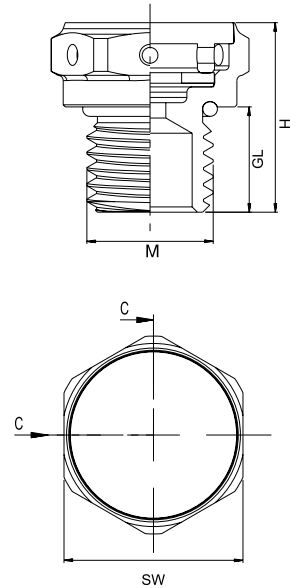

- Material:
  - Polyamide PA6
  - Nickel-plated brass
  - Stainless steel AISI 303L
- Sealing ring: NBR
- Membrane: Hydrophobic-Oleophobic
- Lock nut included
- Ultraviolet (UV) resistance
- Protection: IP68
- Temperature resistance: -40°C +105°C
- Application area:
  - Automation technology
  - Wind-solar energy
  - Industrial
  - Equipment
- Benefits:
  - Pressure compensating seal prevents build up of pressure inside of electronic enclosure due to environmental temperature cycling.
  - It extends the life time on complete system with it's basic feature.
  - Prevents the enclosures against corrosion.



REFERENCES VENTILATION PLUG

VENTILATION PLUG	MATERIAL	SIZE	H (mm)	GL (mm)	 (mm)	THREAD DIAMETER (mm)	HOLE DIAMETER (mm)	AVERAGE AIR FLOW (l/h)	WATER INTRUSION (mbar)	 MINIMUM
MVVAC02	Polyamide PA6	M12x1,5	15	6	18	12	12,3	150	0,2	100
MVVAC02L	Polyamide PA6	M12x1,5	19	10	18	12	12,3	150	0,2	100
MVVAC03	Nickel-plated brass	M12x1,5	14	6	17	12	12,3	150	0,5	50
MVVAC03L	Nickel-plated brass	M12x1,5	18	10	17	12	12,3	150	0,5	50
MVVAC01	Stainless steel AISI303L	M12x1,5	14	6	17	12	12,3	150	0,8	25
MVVAC01L	Stainless steel AISI303L	M12x1,5	18	10	17	12	12,3	150	0,8	25



# CABLE GLANDS EX D/E ATEX



Examples

**Cable Gland Stock With Same Day or Next Day Delivery Service**

Cable glands, stopper plugs, adapters, reducers,...Atex made by Glakor are used for passing, blocking and holding cables between two compartments, such as Atex junction boxes, Atex cabinets and electrical boxes or devices requiring sealing against dust, dirt or water in **hazardous areas**, places considered as potentially explosive, such all **zones: 1, 2, 21 and 22.**



**FOR MORE INFORMATION CLICK HERE**






# BRASS AND STAINLESS STEEL CABLE GLANDS



## CABLE GLANDS UNARMoured EX D / EX E IP66 - IP68



- Material:
  - Nickel-plated brass
  - Stainless steel AISI303
  - Stainless steel AISI304L
  - Stainless steel AISI316L
- O-ring: NBR or silicone (optional)
- Ultraviolet (UV) resistance
- Normative and marking:
  - IEP 2I ATEX 0967X
  - II 2G Exd/e IIC Gb II 1D Ex ta IIIC Da I M2 Exd/e I Mb
  - EN 60079-0:2009, 60079-1:2007, 60079-31:2009
- Protection class: IP66 / IP68 (EN 60529)
- Application area:
  - Zones 1, 2, 2I and 22
  - Group Gas IIA, IIB and IIC

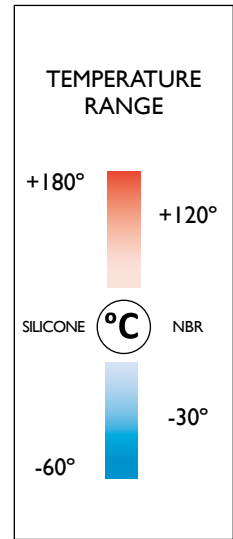

Reference configuration. Examples: MCNAE.M16.SI.S6 or MCNAD.NI-1/4.NB.S4

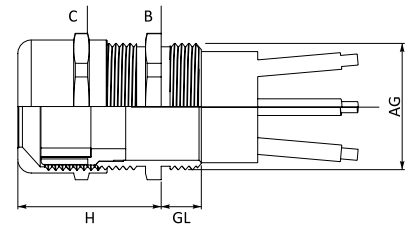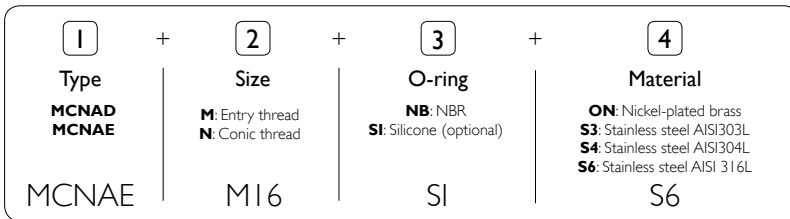

CABLE GLANDS UNARMoured EX D / EX E	SIZE	ENTRY THREAD ISO 262 (AG)	CONIC THREAD NPT (AG)	CLAMPING RANGE (mm)		GL (mm)	Nut (mm)		MINIMUM
				MIN.	MAX.		B	C	
				MCNAD	M12 - NI/4		M12x1,5	1/4"	
MCNAD	M16 - N3/8	M16x1,5	3/8"	4	8	15	18	17	50* / 25**
MCNAD	M20 - NI/2	M20x1,5	1/2"	6	12	15	22	22	50* / 25**
MCNAD	M25S - N3/4S	M25Sx1,5	3/4"	10	14	15	27	24	50* / 25**
MCNAD	M25 - N3/4	M25x1,5	3/4"	13	18	15	30	30	50* / 25**
MCNAD	M32 - NI	M32x1,5	1"	13	18	15	34	30	25* / 10**
MCNAD	M40 - NI-1/4	M40x1,5	1 1/4"	18	25	15	43	40	25* / 10**
MCNAD	M50 - NI-1/2	M50x1,5	1 1/2"	22	32	15	55	50	25* / 10**
MCNAD	M63S - N2S	M63Sx1,5	2"	33	44	15	68	64	25* / 10**
MCNAD	M63 - N2	M63x1,5	2"	45	55	15	70	75	25* / 10**
MCNAD	M75S - N2-1/2S	M75Sx1,5	2 1/2"	45	55	15	85	75	10* / 5**
MCNAD	M75 - N2-1/2	M75x1,5	2 1/2"	50	63	20	90	90	10* / 5**
MCNAD	M80 - N3S	M80x2	3"	50	63	20	90	90	10* / 5**
MCNAD	M90 - N3	M90x2	3"	60	70	20	100	100	10* / 5**
MCNAE	M12 - NI/4	M12x1,5	1/4"	3	6,5	6	14	14	50* / 25**
MCNAE	M16 - N3/8	M16x1,5	3/8"	4	8	7	18	17	50* / 25**
MCNAE	M20 - NI/2	M20x1,5	1/2"	6	12	8	22	22	50* / 25**
MCNAE	M25S - N3/4S	M25Sx1,5	3/4"	10	14	8	27	24	50* / 25**
MCNAE	M25 - N3/4	M25x1,5	3/4"	13	18	8	30	30	50* / 25**
MCNAE	M32 - NI	M32x1,5	1"	13	18	9	34	30	25* / 10**
MCNAE	M40 - NI-1/4	M40x1,5	1 1/4"	18	25	9	43	40	25* / 10**
MCNAE	M50 - NI-1/2	M50x1,5	1 1/2"	22	32	9	55	50	25* / 10**
MCNAE	M63S - N2S	M63Sx1,5	2"	33	44	14	68	64	25* / 10**
MCNAE	M63 - N2	M63x1,5	2"	45	55	15	70	75	25* / 10**
MCNAE	M75S - N2-1/2S	M75Sx1,5	2 1/2"	45	55	15	85	75	10* / 5**
MCNAE	M75 - N2-1/2	M75x1,5	2 1/2"	50	63	20	90	90	10* / 5**
MCNAE	M80 - N3S	M80x2	3"	50	63	20	90	90	10* / 5**
MCNAE	M90 - N3	M90x2	3"	60	70	20	100	100	10* / 5**


\* Nickel-plated brass

\*\* Stainless steel AISI303L - Stainless steel AISI304L - Stainless steel AISI316L

## DOUBLE COMPRESSION CABLE GLANDS ARMoured EX D/E IP66 - IP68




- Material:
  - Nickel-plated brass
  - Stainless steel AISI303
  - Stainless steel AISI304L
  - Stainless steel AISI316L
- O-ring: NBR or silicone (optional)
- ULtraviolet (UV) resistance
- Normative and marking:
  - IE P 21 ATEX 0966X
  - II 2G Exd/e IIC Gb II ID Ex ta IIIC Da I M2 Exd/e I Mb
  - EN 60079-0:2009, 60079-1:2007, 60079-31:2009
- Protection class: IP66 / IP68 (EN 60529)
- Application area:
  - Zones 1, 2, 21 and 22
  - Group Gas IIA, IIB and IIC

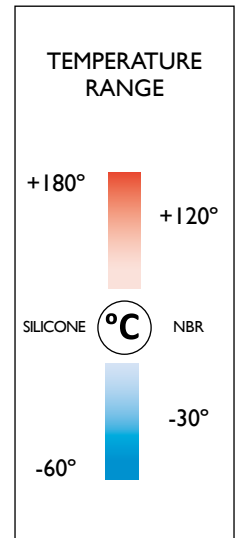

Reference configuration. Examples: MVCGA2.M16.SI.S6 or MVCGA2.NI/2.NB.S3

1	+	2	+	3	+	4
<b>Type</b> MVCGA2		<b>Size</b>		<b>O-ring</b>		<b>Material</b>
		<b>M:</b> Entry thread <b>N:</b> Conic thread		<b>NB:</b> NBR <b>SI:</b> Silicone (optional)		<b>ON:</b> Nickel-plated brass <b>S3:</b> Stainless steel AISI303L <b>S4:</b> Stainless steel AISI304L <b>S6:</b> Stainless steel AISI 316L
MVCGA2		M16		SI		S6

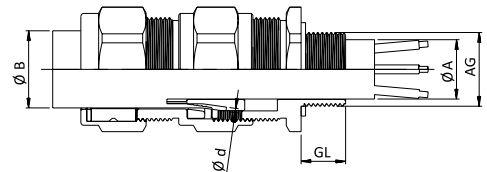

REFERENCES DOUBLE COMPRESSION CABLE GLANDS ARMoured EX D/E												
DOUBLE COMPRESSION CABLE GLANDS ARMoured EX D/E	SIZE	ENTRY THREAD ISO 262 (AG)	CONIC THREADS NPT (AG)	A		B		Ø D		GL (mm)	Wrench (mm)	MINIMUM
				MIN.	MAX.	MIN.	MAX.	MIN.	MAX.			
MVCGA2	M16 - NI/2S5	M16x1,5	1/2"	3,1	8,6	6,1	13,2	0,8	1,0	15	24	50* / 25**
MVCGA2	M20S - NI/2S	M20Sx1,5	1/2"	6,1	11,6	9,5	15,9	0,8	1,25	15	24	50* / 25**
MVCGA2	M20 - NI/2	M20x1,5	1/2"	6,5	13,9	12,5	20,9	0,8	1,25	15	30	50* / 25**
MVCGA2	M25S - N3/4S	M25Sx1,5	3/4"	11,1	19,9	14	22	1,25	1,60	15	38	50* / 25**
MVCGA2	M25 - N3/4	M25x1,5	3/4"	11,1	19,9	18,2	26,2	1,25	1,60	15	38	50* / 25**
MVCGA2	M32 - NI	M32x1,5	1"	18,2	26,2	23,7	33,9	1,6	2,0	15	45	50* / 25**
MVCGA2	M40 - NI 1/4	M40x1,5	1 1/4"	23,7	33,9	27,9	40,4	1,6	2,0	15	55	25* / 10**
MVCGA2	M50S - NI 1/2	M50Sx1,5	1 1/2"	29,5	38,1	35,2	46,7	2,0	2,5	15	60	25* / 10**
MVCGA2	M50 - N2S	M50x1,5	2"	35,6	44,0	40,4	53,1	2,0	2,5	15	70	25* / 10**
MVCGA2	M63S - N2	M63Sx1,5	2"	40,1	49,9	45,6	59,4	2,0	2,5	15	75	25* / 10**
MVCGA2	M63 - N21/2S	M63x1,5	2 1/2"	47,2	55,9	54,6	65,9	2,0	2,5	15	80	25* / 10**
MVCGA2	M75S - N21/2	M75Sx1,5	2 1/2"	52,8	61,9	59	72,1	2,0	2,5	15	90	10* / 5**
MVCGA2	M75 - N3S	M75x1,5	3"	59,1	67,9	66,7	78,5	2,5	3,0	15	100	10* / 5**
MVCGA2	M90 - N3	M90x2,0	3"	66,6	79,9	76,2	90,4	3,0	3,5	15	115	10* / 5**
MVCGA2	M100	M100x2,0	-	76	90	86,1	101,5	3,15	4,0	15	123	10* / 5**
MVCGA2	M115	M115x2,0	-	86	97,9	101,5	110,3	3,15	4,0	15	133	10* / 5**
MVCGA2	M130	M130x2,0	-	97	114,9	114,2	123,3	3,15	4,0	15	146	10* / 5**

\* Nickel-plated brass


\*\* Stainless steel AISI303L - Stainless steel AISI304L - Stainless steel AISI316L

# POLYAMIDE CABLE GLANDS



## POLYAMIDE CABLE GLANDS EX/E IP68



- Material: Polyamide (Nylon) - UL 94V-2
- O-ring Silicone
- Features: V2 (UL94), halogen free, not containing any cadmium phosphorus, UV-resistance and anti-aging test
- Marking:
  - Ex e IIC Gb
  - Ex tD A21 IP68
- Protection class: IP68
- Application area:
  - Zones 1, 2, 21 and 22
  - Group Gas IIA, IIB and IIC

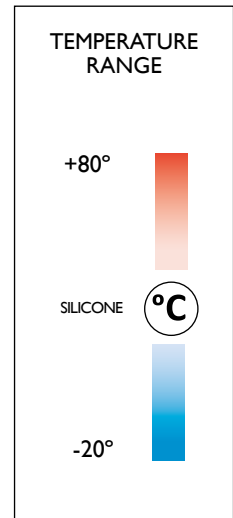

Reference configuration. Examples: MVCG.M16.EXE.NY or MVCG.M40.EXE.NY

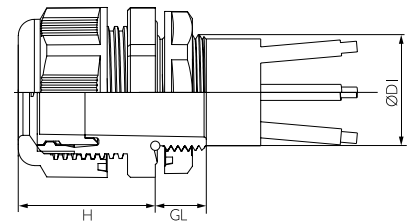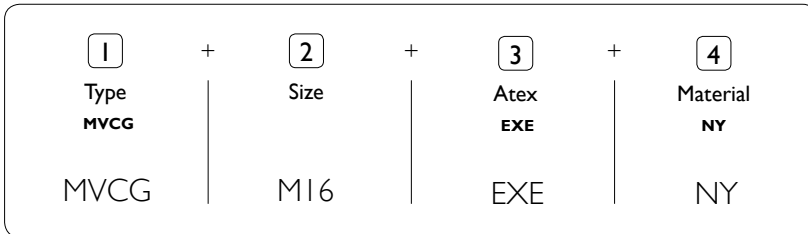


REFERENCES POLYAMIDE CABLE GLANDS EX/E								
POLYAMIDE CABLE GLANDS EX/E	SIZE	ENTRY THREAD ISO 262	CLAMPING RANGE		H (mm)	GL (mm)	Wrench (mm)	MINIMUM
			≥	≤				
MVCG	M12	M12x1,5	3	6,5	21	8	15	50
MVCG	M16	M16x1,5	5	10	25	8	22	50
MVCG	M20	M20x1,5	10	14	28	9	27	50
MVCG	M25	M25x1,5	13	18	31	11	33	50
MVCG	M32	M32x1,5	18	25	37	11	42	25
MVCG	M40	M40x1,5	22	32	48	13	53	25
MVCG	M50	M50x1,5	32	38	49	13	60	10
MVCG	M63	M63x1,5	37	44	49	14	65 / 68	10





## CABLE GLANDS ATEX INCREASED SECURITY POLYAMIDE EX/I IP68



- Material: Polyamide (Nylon) - UL 94V-2
- O-ring Silicone
- Features: V2 (UL94), halogen free, not containing any cadmium phosphorus, UV-resistance and anti-aging test
- Marking:
  - Ex e IIC Gb
  - Ex tD A21 IP68
- Protection class: IP68
- Application area:
  - Zones 1, 2, 21 and 22
  - Group Gas IIA, IIB and IIC

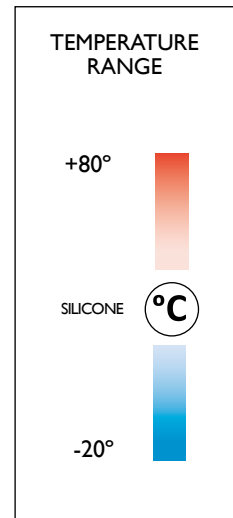

Reference configuration. Examples: MVCG.M16.EX.AZ.NY or MVCG.M40.EX.AZ.NY

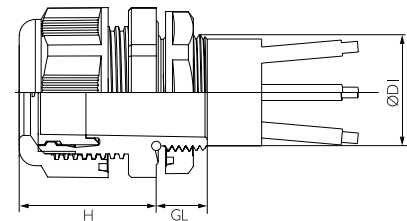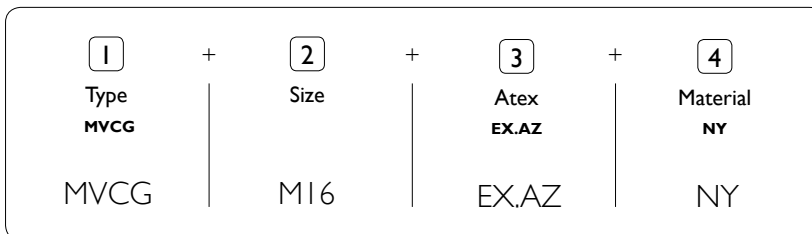

REFERENCES POLYAMIDE CABLE GLANDS EX/I								
POLYAMIDE CABLE GLANDS EX/I	SIZE	ENTRY THREAD ISO 262	CLAMPING RANGE		H (mm)	GL (mm)	(mm)	MINIMUM
			≥	≤				
MVCG	M12	M12x1,5	3	6,5	21	8	15	50
MVCG	M16	M16x1,5	5	10	25	8	22	50
MVCG	M20	M20x1,5	10	14	28	9	27	50
MVCG	M25	M25x1,5	13	18	31	11	33	50
MVCG	M32	M32x1,5	18	25	37	11	42	25
MVCG	M40	M40x1,5	22	32	48	13	53	25
MVCG	M50	M50x1,5	32	38	49	13	60	10
MVCG	M63	M63x1,5	37	44	49	14	65 / 68	10




# PLUGS

## STOPPER PLUG EX D/E IP66 - IP68




- Material:
  - Nickel-plated brass
  - Stainless steel AISI303
  - Stainless steel AISI304L
  - Stainless steel AISI316L
- O-ring: NBR
- Ultraviolet (UV) resistance
- Normative and marking:
  - II 2G Exd/e IIC Gb II ID Ex ta IIIC Da I M2 Ex d/e I Mb
  - EN 60079-0 2009 /60079-1 2007/ 60079-3 I 2009
- Protection class: IP66 / IP68 (EN 60529)
- Application area:
  - Zones 1, 2, 21 and 22
  - Group Gas IIA, IIB and IIC

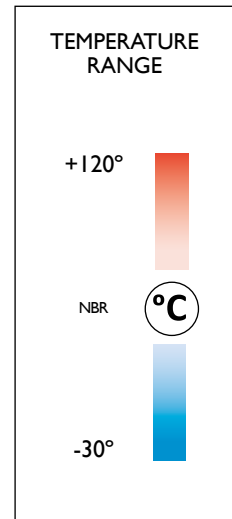

Reference configuration. Examples: MVTC.M16.S6.EX or MVTX.N21/2.ON

<b>1</b>	+	<b>2</b>	+	<b>3</b>	+	<b>4</b>
Type		Size		Material		Atex
MVTC		M16 <small>M: Entry thread N: Conic thread</small>		S6 <small>ON: Nickel-plated brass S3: Stainless steel AISI303L S4: Stainless steel AISI304L S6: Stainless steel AISI 316L</small>		EX
MVTC		M16		S6		EX

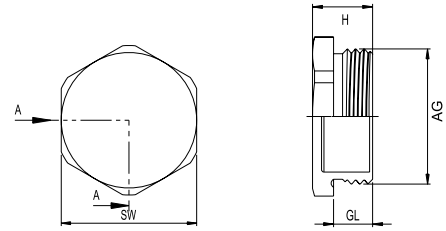

REFERENCES STOPPER PLUG						
STOPPER PLUG	CODE	SIZE	GL (MIN. mm)	H (mm)	SW (mm)	MINIMUM
MVTC	M12	M12x1,5	15	22	17	25* / 10**
MVTC	M16	M16x1,5	15	22	22	25* / 10**
MVTC	M20	M20x1,5	15	22	24	25* / 10**
MVTC	M25	M25x1,5	15	22	30	25* / 10**
MVTC	M32	M32x1,5	15	22	36	10* / 5**
MVTC	M40	M40x1,5	15	22	45	10* / 5**
MVTC	M50	M50x1,5	15	22	55	5* / 1**
MVTC	M63	M63x1,5	15	22	70	5* / 1**
MVTC	M75	M75x1,5	15	22	80	5* / 1**
MVTC	M90	M90x2	20	27	95	5* / 1**
MVTC	M100	M100x2	20	27	110	5* / 1**
MVTC	N1/4	NPT1/4"	15	22	15	25* / 10**
MVTC	N3/8	NPT3/8"	15	22	20	25* / 10**
MVTC	N1/2	NPT1/2"	15	22	24	25* / 10**
MVTC	N3/4	NPT3/4"	15	22	27	25* / 10**
MVTC	N1	NPT1"	15	22	35	10* / 5**
MVTC	N1 1/4	NPT1 1/4"	15	22	45	10* / 5**
MVTC	N1 1/2	NPT1 1/2"	15	22	50	5* / 1**
MVTC	N2	NPT2"	15	22	65	5* / 1**
MVTC	N2 1/2	NPT2 1/2"	20	27	75	5* / 1**
MVTC	N3	NPT3"	20	27	90	5* / 1**
MVTC	N4	NPT4"	20	27	115	5* / 1**


\* Nickel-plated brass

\*\* Stainless steel AISI303L - Stainless steel AISI304L - Stainless steel AISI316L

## PLUG POLYAMIDE EX/E IP66 - IP68




- Material: Polyamide (Nylon)
- O-ring: Silicone
- Features: water proof
- Ultraviolet (UV) resistance
- Normative and marking:
  - Ex eII Gb Ex tD A20
  - IEC - EN 60079
- Protection class: IP66
- Application area:
  - Zones I, 2, 21 and 22
  - Group Gas IIA, IIB and IIC

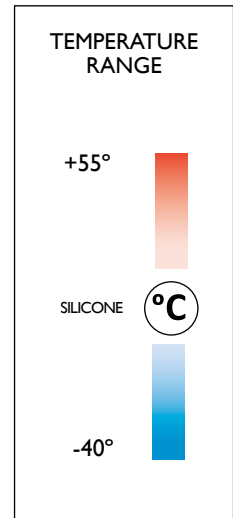

Reference configuration. Examples: DVT.EX.M16.NY or DVT.EX.M40.N

<b>1</b>	+	<b>2</b>	+	<b>3</b>	+	<b>4</b>
Type		Atex		Size		Material
DVT		EX		M16		NY

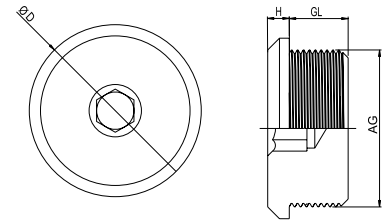

REFERENCES PLUG POLYAMIDE EX/E						
PLUG POLYAMIDE EX/E	SIZE	ENTRY THREAD ISO 262 (AG)	GL	H	ØD	MINIMUM
DVT	M16	M16x1,5	14	4	22	100
DVT	M20	M20x1,5	15	4	26,4	100
DVT	M25	M25x1,5	15	4	31,9	100
DVT	M32	M32x1,5	16	5,5	39,6	50
DVT	M40	M40x1,5	16	5,5	50,6	50
DVT	M50	M50x1,5	16	5,5	60,5	25
DVT	M 63	M63x1,5	19	7,5	74,8	25




# ADAPTERS EX D/E IP66 - IP68


## ADAPTER REDUCER EX D/E IP66 - IP68



- Material: Nickel-plated brass and stainless steel AISI 316L
- Protection class: IP66 / IP68
- Ultraviolet (UV) resistance
- Application fields: Surface - Group II • Mines - Group I
- Protection type and normative:
  - Ex db IIC • Ex eb II (gas) • Ex tb IIIC (dusts) • Ex db I • Ex eb I (mines)
  - Atex: EN 60079-0:2012 • EN 60079-1:2014 • EN 60079-7:2015 • EN 60079-31:2014 • EN 60529:1991
  - IECEx: IEC 60079-0:2011 • IEC 60079-1:2014 • IEC 60079-7:2015 • IEC 60079-15:2010 • IEC 60079-31:2013 • IEC 60529:1989

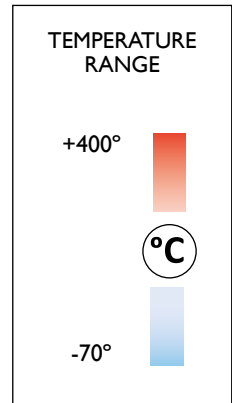

Reference configuration. Examples: MVAD.M20N1/4.S6 or MVAD.N3/8M12.ON

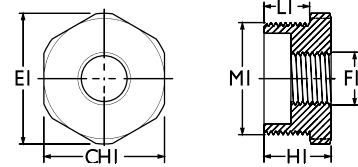

### CODE REFERENCES - ADAPTER REDUCER EX D/E

FEMALE - NPT (F1)										
		NPT1/4"	NPT3/8"	NPT1/2"	NPT3/4"	NPT1"	NPT1 1/4"	NPT1 1/2"	NPT2"	NPT2 1/2"
MALE - METRICAL ISO 262 (M1)	M20x1,5	M20N1/4	-	-	-	-	-	-	-	-
	M25x1,5	M25N1/4	M25N3/8	M25M20	-	-	-	-	-	-
	M32x1,5	M32N1/4	M32N3/8	M32M20	M32N3/4	-	-	-	-	-
	M40x1,5	M40N1/4	M40N3/8	M40M20	M40N3/4	M40N1	-	-	-	-
	M50x1,5	M50N1/4	M50N3/8	M50M20	M50N3/4	M50N1	M50N1 1/4	-	-	-
	M63x1,5	M63N1/4	M63N3/8	M63M20	M63N3/4	M63N1	M63N1 1/4	M63N1 1/2	-	-
	M75x1,5	M75N1/4	M75N3/8	M75M20	M75N3/4	M75N1	M75N1 1/4	M75N1 1/2	M75N2	-
M90x1,5	M90N1/4	M90N3/8	M90M20	M90N3/4	M90N1	M90N1 1/4	M90N1 1/2	M90N2	M90N2 1/2	

HEMBRA - MÉTRICO ISO 262 (F1)										
		M12x1,5	M16x1,5	M20x1,5	M25x1,5	M32x1,5	M40x1,5	M50x1,5	M63x1,5	M75x1,5
MALE - NPT (M1)	NPT3/8"	N3/8M12	-	-	-	-	-	-	-	-
	NPT1/2"	N1/2M12	N1/2M16	-	-	-	-	-	-	-
	NPT3/4"	N3/4M12	N3/4M16	N3/4M20	-	-	-	-	-	-
	NPT1"	N1M12	N1M16	N1M20	N1M25	-	-	-	-	-
	NPT1 1/4"	N1 1/4M12	N1 1/4M16	N1 1/4M20	N1 1/4M25	N1 1/4M32	-	-	-	-
	NPT1 1/2"	N1 1/2M12	N1 1/2M16	N1 1/2M20	N1 1/2M25	N1 1/2M32	N1 1/2M40	-	-	-
	NPT2"	N2M12	N2M16	N2M20	N2M25	N2M32	N2M40	N2M50	-	-
	NPT2 1/2"	N2 1/2M12	N2 1/2M16	N2 1/2M20	N2 1/2M25	N2 1/2M32	N2 1/2M40	N2 1/2M50	N2 1/2M63	-
	NPT3"	N3M12	N3M16	N3M20	N3M25	N3M32	N3M40	N3M50	N3M63	N3M75

See the code in the references table and find the sizes in the dimensions table.


DIMENSIONS ADAPTER REDUCER EX D/E (mm)				
CODE	CHI	EI	LI	HI
M20N1/4	24	26,4	15	26
M25N1/4 • M25N3/8 • M25M20	30	33	15	26
M32N1/4 • M32N3/8 • M32M20 • M32N3/4	36	39,6	15	26
M40N1/4 • M40N3/8 • M40M20 • M40N3/4 • M40N1	45	49,5	15	26
M50N1/4 • M50N3/8 • M50M20 • M50N3/4 • M50N1	55	60	15	29
M63N1/4 • M63N3/8 • M63M20 • M63N3/4 • M63N1 • M63N1 1/4 • M63N1 1/2	-	70	15	29
M75N1/4 • M75N3/8 • M75M20 • M75N3/4 • M75N1 • M75N1 1/4 • M75N1 1/2 • M75N2	-	80	20	34
M90N1/4 • M90N3/8 • M90M20 • M90N3/4 • M90N1 • M90N1 1/4 • M90N1 1/2 • M90N2 • M90N2 1/2	-	95	20	34

DIMENSIONS ADAPTER REDUCER EX D/E (mm)				
CODE	CHI	EI	LI	HI
N3/8M12	20	22	15	26
N1/2M12 • N1/2M16	24	26,4	18	29
N3/4M12 • N3/4M16 • N3/4M20	27	29,7	18	29
N1M12 • N1M16 • N1M20 • N1M25	36	39,6	22	33
N1 1/4M12 • N1 1/4M16 • N1 1/4M20 • N1 1/4M25 • N1 1/4M32	45	49,5	22	33
N1 1/2M12 • N1 1/2M16 • N1 1/2M20 • N1 1/2M25 • N1 1/2M32 • N1 1/2M40	50	55	24	38
N2M12 • N2M16 • N2M20 • N2M25 • N2M32 • N2M40 • N2M50	-	65	24	38
N2 1/2M12 • N2 1/2M16 • N2 1/2M20 • N2 1/2M25 • N2 1/2M32 • N2 1/2M40 • N2 1/2M50 • N2 1/2M63	-	75	28	42
N3M12 • N3M16 • N3M20 • N3M25 • N3M32 • N3M40 • N3M50 • N3M63 • N3M75	-	90	28	42


Available upon request

# ADAPTER ENLARGER EX D/E IP66 - IP68

- Material: Nickel-plated brass and stainless steel AISI 316L
- Protection class: IP66 / IP68
- ULtraviolet (UV) resistance
- Application fields: Surface - Group II • Mines - Group I
- Protection type and normative:
  - Ex db IIC • Ex eb II (gas) • Ex tb IIIC (dusts) • Ex db I • Ex eb I (mines)
  - Atex: EN 60079-0:2012 • EN 60079-1:2014 • EN 60079-7:2015 • EN 60079-31:2014 • EN 60529:1991
  - IECEx: IEC 60079-0:2011 • IEC 60079-1:2014 • IEC 60079-7:2015 • IEC 60079-15:2010 • IEC 60079-31:2013 • IEC 60529:1989

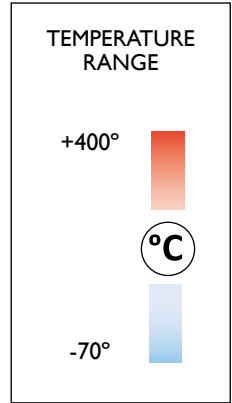

Reference configuration. Examples: MVAD.M12N1/4.S6 or MVAD.N1/4M25.ON

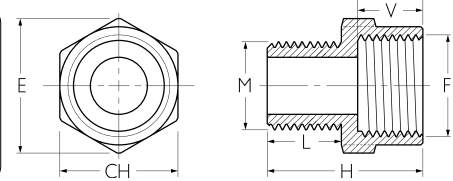

## CODE REFERENCES - ADAPTER ENLARGER EX D/E

FEMALE - NPT (F1)											
	NPT1/4"	NPT3/8"	NPT1/2"	NPT3/4"	NPT1"	NPT1 1/4"	NPT1 1/2"	NPT2"	NPT2 1/2"	NPT3"	
MALE - METRICAL ISO 262 (M)	M12x1,5	M12N1/4	M12N3/8	M12N1/2	M12N3/4	M12N1	M12N1 1/4	M12N1 1/2	M12N2	M12N2 1/2	M12N3
	M16x1,5	M16N1/4	M16N3/8	M16N1/2	M16N3/4	M16N1	M16N1 1/4	M16N1 1/2	M16N2	M16N2 1/2	M16N3
	M20x1,5	-	M20N3/8	M20N1/2	M20N3/4	M20N1	M20N1 1/4	M20N1 1/2	M20N2	M20N2 1/2	M20N3
	M25x1,5	-	-	-	M25N3/4	M25N1	M25N1 1/4	M25N1 1/2	M25N2	M25N2 1/2	M25N3
	M32x1,5	-	-	-	-	M32N1	M32N1 1/4	M32N1 1/2	M32N2	M32N2 1/2	M32N3
	M40x1,5	-	-	-	-	-	M40N1 1/4	M40N1 1/2	M40N2	M40N2 1/2	M40N3
	M50x1,5	-	-	-	-	-	-	M50N1 1/2	M50N2	M50N2 1/2	M50N3
	M63x1,5	-	-	-	-	-	-	-	M63N2	M63N2 1/2	M63N3
	M75x1,5	-	-	-	-	-	-	-	-	M75N2 1/2	M75N3
	M90x1,5	-	-	-	-	-	-	-	-	-	M90N3

FEMALE - METRICAL ISO 262 (F)											
	M12x1,5	M16x1,5	M20x1,5	M25x1,5	M32x1,5	M40x1,5	M50x1,5	M63x1,5	M75x1,5	M90x1,5	
MALE - NPT (M)	NPT1/4"	N1/4M12	N1/4M16	N1/4M20	N1/4M25	N1/4M32	N1/4M40	N1/4M50	N1/4M63	N1/4M75	N1/4M90
	NPT3/8"	-	N3/8M16	N3/8M20	N1/4M25	N3/8M32	N3/8M40	N3/8M50	N3/8M63	N3/8M75	N3/8M90
	NPT1/2"	-	-	N1/2M20	N1/2M25	N1/2M32	N1/2M40	N1/2M50	N1/2M63	N1/2M75	N1/2M90
	NPT3/4"	-	-	-	N3/4M25	N3/4M32	N3/4M40	N3/4M50	N3/4M63	N3/4M75	N3/4M90
	NPT1"	-	-	-	-	N1M32	N1M40	N1M50	N1M63	N1M75	N1M90
	NPT1 1/4"	-	-	-	-	-	N1 1/4M40	N1 1/4M50	N1 1/4M63	N1 1/4M75	N1 1/4M90
	NPT1 1/2"	-	-	-	-	-	-	N1 1/2M50	N1 1/2M63	N1 1/2M75	N1 1/2M90
	NPT2"	-	-	-	-	-	-	-	N2M63	N2M75	N2M90
	NPT2 1/2"	-	-	-	-	-	-	-	-	N2 1/2M75	N2 1/2M90
	NPT3"	-	-	-	-	-	-	-	-	-	N3M90

See the code in the references table and find the sizes in the dimensions table.

DIMENSIONS ADAPTER ENLARGER EX D/E (mm)					
CODE	CH	E	L	V	H
M12N1/4 • M16N1/4 • N1/4M12	20	22	15	15	33
M12N3/8 • M16N3/8 • M20N3/8 • N1/4M16 • N3/8M16	24	26,4	15	15	33
M12N1/2 • M16N1/2 • M20N1/2	26	28,6	15	18	36
M12N3/4 • M16N3/4 • M20N3/4 • M25N3/4	32	35	15	18	36
M12N1 • M16N1 • M20N1 • M25N1 • M32N1	40	44	15	22	40
M12N1 1/4 • M16N1 1/4 • M20N1 1/4 • M25N1 1/4 • M32N1 1/4 • M40N1 1/4	50	55	15	22	40
M12N1 1/2 • M16N1 1/2 • M20N1 1/2 • M25N1 1/2 • M32N1 1/2 • M40N1 1/2 • M50N1 1/2	55	60	15	24	42
M12N2 • M16N2 • M20N2 • M25N2 • M32N2 • M40N2 • M50N2 • M63N2	-	70	15	24	42
M12N2 1/2 • M16N2 1/2 • M20N2 1/2 • M25N2 1/2 • M32N2 1/2 • M40N2 1/2 • M50N2 1/2 • M63N2 1/2 • M75N2 1/2	-	80	15	28	46
M12N3 • M16N3 • M20N3 • M25N3 • M32N3 • M40N3 • M50N3 • M63N3	-	95	15	28	46
M75N3 • M90N3	-	95	20	28	51
N1/4M20 • N3/8M20	26	28,6	15	15	33
N1/4M25 • N1/4M32	32	35	15	15	33
N1/4M32 • N3/8M32	40	44	15	45	33
N1/4M40 • N3/8M40	45	49,5	15	15	33

DIMENSIONS ADAPTER ENLARGER EX D/E (mm)					
CODE	CH	E	L	V	H
N1/4M50 • N3/8M50	55	60	15	15	33
N1/4M63 • N3/8M63	-	70	15	15	33
N1/4M75 • N3/8M75	-	85	15	20	38
N1/4M90 • N3/8M90	-	100	15	20	38
N1/2M20	26	28,6	18	15	36
N1/2M25 • N3/4M25	32	35	18	15	36
N1/2M32 • N3/4M32	40	44	18	15	36
N1M32	40	44	22	15	40
N1/2M40 • N3/4M40	45	49,5	18	15	36
N1M40 • N1 1/4M40	45	49,5	22	15	40
N1/2M50 • N3/4M50	55	60	18	15	36
N1M50 • N1 1/4M50	55	60	22	15	40
N1 1/2M50	55	60	24	15	42
N1/2M63 • N3/4M63	-	70	18	15	36
N1M63 • N1 1/4M63	-	70	22	15	40
N1 1/2M63 • N2M63	-	70	24	15	42
N1/2M75 • N3/4M75	-	85	18	20	41
N1M75 • N1 1/4M75	-	85	22	20	45
N1 1/2M75 • N2M75	-	85	24	20	47
N2 1/2M75	-	85	28	20	51
N1 1/2M90 • N3/4M90	-	100	18	20	41
N1M90 • N1 1/4M90	-	100	22	20	45
N1 1/2M90 • N2M90	-	100	24	20	47
N2 1/2M90 • N3M90	-	100	28	20	51

Available upon request




# ENLARGER - REDUCER EX D/E IP66 - IP68

## REDUCER EX D/E IP66 - IP68




- Material: Nickel-plated brass and stainless steel AISI316L
- Protection class: IP66 / IP68
- Ultraviolet (UV) resistance
- Application fields: Surface - Group II • Mines - Group I
- Protection type and normative:
  - Ex db IIC • Ex eb II (gas) • Ex tb IIIC (dusts) • Ex db I • Ex eb I (mines)
  - Atex: EN 60079-0:2012 • EN 60079-1:2014 • EN 60079-7:2015 • EN 60079-31:2014 • EN 60529:1991
  - IECEx: IEC 60079-0:2011 • IEC 60079-1:2014 • IEC 60079-7:2015 • IEC 60079-15:2010 • IEC 60079-31:2013 • IEC 60529:1989

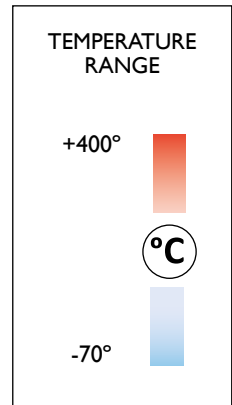

Reference configuration. Examples: MVAD.MI6MI2.S6 or MVAD.NI1/4N3/8.ON

1	+	2	+	3
Type		Code		Material
MVADI		MI6MI2		S6
				ON: Nickel-plated brass S6: Stainless steel AISI 316L

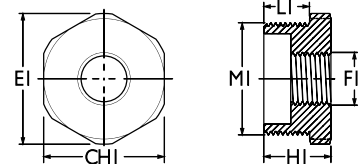

### CODE REFERENCES - REDUCER EX D/E

FEMALE - METRICAL ISO 262 (F1)										
MALE - METRICAL ISO 262 (M1)	M12x1,5	M16x1,5	M20x1,5	M25x1,5	M32x1,5	M40x1,5	M50x1,5	M63x1,5	M75x1,5	M90x1,5
M16x1,5	M16M12	-	-	-	-	-	-	-	-	-
M20x1,5	M20M12	M20M16	-	-	-	-	-	-	-	-
M25x1,5	M25M12	M25M16	M25M20	-	-	-	-	-	-	-
M32x1,5	M32M12	M32M16	M32M20	M32M25	-	-	-	-	-	-
M40x1,5	M40M12	M40M16	M40M20	M40M25	M40M32	-	-	-	-	-
M50x1,5	M50M12	M50M16	M50M20	M50M25	M50M32	M50M40	-	-	-	-
M63x1,5	M63M12	M63M16	M63M20	M63M25	M63M32	M63M40	M63M50	-	-	-
M75x1,5	M75M12	M75M16	M75M20	M75M25	M75M32	M75M40	M75M50	M75M50	-	-
M90x1,5	M90M12	M90M16	M90M20	M90M25	M90M32	M90M40	M90M50	M90M50	M90M75	-

FEMALE - NPT (F1)										
MALE - NPT (M1)	NPT1/4"	NPT3/8"	NPT1/2"	NPT3/4"	NPT1"	NPT1 1/4"	NPT1 1/2"	NPT2"	NPT2 1/2"	NPT3"
NPT1/2"	N1/2N1/4	-	-	-	-	-	-	-	-	-
NPT3/4"	N3/4N1/4	N3/4N3/8	N3/4N1/2	-	-	-	-	-	-	-
NPT1"	N1N1/4	N1N3/8	N1N1/2	N1N3/4	-	-	-	-	-	-
NPT1 1/4"	N11/4N1/4	N11/4N3/8	N11/4N1/2	N11/4N3/4	N11/4N1	-	-	-	-	-
NPT1 1/2"	N11/2N1/4	N11/2N3/8	N11/2N1/2	N11/2N3/4	N11/2N1	N11/2N1 1/4	-	-	-	-
NPT2"	N2N1/4	N2N3/8	N2N1/2	N2N3/4	N2N1	N2N1 1/4	N2N1 1/2	-	-	-
NPT2 1/2"	N21/2N1/4	N21/2N3/8	N21/2N1/2	N21/2N3/4	N21/2N1	N21/2N1 1/4	N21/2N1 1/2	N21/2N2	-	-
NPT3"	N3N1/4	N3N3/8	N3N1/2	N3N3/4	N3N1	N3N1 1/4	N3N1 1/2	N3N2	N3N2 1/2	-

See the code in the references table and find the sizes in the dimensions table.

DIMENSIONS REDUCER EX D/E (mm)				
CODE	CHI	EI	LI	HI
M16M12	20	22	15	26
M20M12 • M20M16	24	26,4	15	26
M25M12 • M25M16 • M25M20	30	33	15	26
M32M12 • M32M16 • M32M20 • M32M25	36	39,6	15	26
M40M12 • M40M16 • M40M20 • M40M25 • M40M32	45	49,5	15	26
M50M12 • M50M16 • M50M20 • M50M25 • M50M32 • M50M40	55	60	15	29
M63M12 • M63M16 • M63M20 • M63M25 • M63M32 • M63M40 • M63M50	-	70	15	29
M75M12 • M75M16 • M75M20 • M75M25 • M75M32 • M75M40 • M75M50 • M75M50	-	80	20	34
M90M12 • M90M16 • M90M20 • M90M25 • M90M32 • M90M40 • M90M50 • M90M50 • M90M75	-	95	20	34


DIMENSIONS REDUCER EX D/E (mm)				
CODE	CHI	EI	LI	HI
N1/2N1/4	24	26,4	18	29
N3/4N1/4 • N3/4N3/8 • N3/4N1/2	27	29,7	18	29
N1N1/4 • N1N3/8 • N1N1/2 • N1N3/4	36	39,6	22	33
N11/4N1/4 • N11/4N3/8 • N11/4N1/2 • N11/4N3/4 • N11/4N1	45	49,5	22	33
N11/2N1/4 • N11/2N3/8 • N11/2N1/2 • N11/2N3/4 • N11/2N1 • N11/2N1 1/4	50	55	24	38
N2N1/4 • N2N3/8 • N2N1/2 • N2N3/4 • N2N1 • N2N1 1/4 • N2N1 1/2	-	65	24	38
N21/2N1/4 • N21/2N3/8 • N21/2N1/2 • N21/2N3/4 • N21/2N1 • N21/2N1 1/4 • N21/2N1 1/2 • N21/2N2	-	75	28	42
N3N1/4 • N3N3/8 • N3N1/2 • N3N3/4 • N3N1 • N3N1 1/4 • N3N1 1/2 • N3N2 • N3N2 1/2	-	90	28	42

Available upon request


# ENLARGER EX D/E IP66 - IP68



- Material: Nickel-plated brass and stainless steel AISI 316L
- Protection class: IP66 / IP68
- Ultraviolet (UV) resistance
- Application fields: Surface - Group II • Mines - Group I
- Protection type and normative:
  - Ex db IIC • Ex eb II (gas) • Ex tb IIIC (dusts) • Ex db I • Ex eb I (mines)
  - Atex: EN 60079-0:2012 • EN 60079-1:2014 • EN 60079-7:2015 • EN 60079-31:2014 • EN 60529:1991
  - IECEx: IEC 60079-0:2011 • IEC 60079-1:2014 • IEC 60079-7:2015 • IEC 60079-15:2010 • IEC 60079-31:2013 • IEC 60529:1989

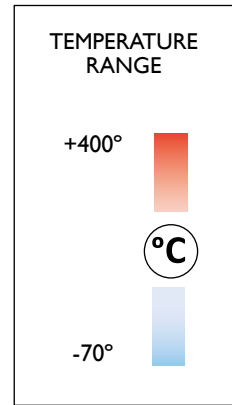

Reference configuration. Examples: MVAD.MI2MI6.S6 or MVAD.NI/4N3/8.ON

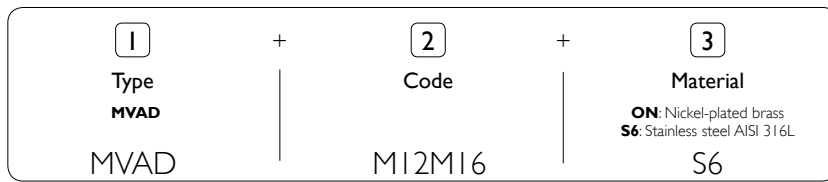

## CODE REFERENCES - ENLARGER EX D/E

FEMALE - METRICAL ISO 262 (F)																				
MALE - METRICAL ISO 262 (M)	M12x1,5	M12M12	M16x1,5	M16M16	M20x1,5	M20M20	M25x1,5	M25M25	M32x1,5	M32M32	M40x1,5	M40M40	M50x1,5	M50M50	M63x1,5	M63M63	M75x1,5	M75M75	M90x1,5	M90M90
M12x1,5	M12M12		M16x1,5	M16M16	M20x1,5	M20M20	M25x1,5	M25M25	M32x1,5	M32M32	M40x1,5	M40M40	M50x1,5	M50M50	M63x1,5	M63M63	M75x1,5	M75M75	M90x1,5	M90M90
M16x1,5	-		M16M16	M16M20	M16M25	M16M32	M16M40	M16M50	M16M63	M16M75	M16M90									
M20x1,5	-		-	M20M20	M20M25	M20M32	M20M40	M20M50	M20M63	M20M75	M20M90									
M25x1,5	-		-	-	M20M25	M25M32	M25M40	M25M50	M25M63	M25M75	M25M90									
M32x1,5	-		-	-	-	M32M32	M32M40	M32M50	M32M63	M32M75	M32M90									
M40x1,5	-		-	-	-	-	M40M40	M40M50	M40M63	M40M75	M40M90									
M50x1,5	-		-	-	-	-	-	M50M50	M50M63	M50M75	M50M90									
M63x1,5	-		-	-	-	-	-	-	M63M63	M63M75	M63M90									
M75x1,5	-		-	-	-	-	-	-	-	M75M75	M75M90									
M90x1,5	-		-	-	-	-	-	-	-	-	M90M90									

FEMALE - NPT (F)											
MALE - NPT (M)	NPT1/4"	NPT3/8"	NPT1/2"	NPT3/4"	NPT1"	NPT1 1/4"	NPT1 1/2"	NPT2"	NPT2 1/2"	NPT3"	
NPT1/4"	N1/4N1/4	N1/4N3/8	N1/4N1/2	N1/4N3/4	N1/4N1"	N1/4N1 1/4	N1/4N1 1/2	N1/4N2	N1/4N2 1/2	N1/4N3	
NPT3/8"	N3/8N1/4	N3/8N3/8	N3/8N1/2	N3/8N3/4	N3/8N1"	N3/8N1 1/4	N3/8N1 1/2	N3/8N2	N3/8N2 1/2	N3/8N3	
NPT1/2"	-	N1/2N3/8	N1/2N1/2	N1/2N3/4	N1/2N1"	N1/2N1 1/4	N1/2N1 1/2	N1/2N2	N1/2N2 1/2	N1/2N3	
NPT3/4"	-	-	-	N3/4N3/4	N3/4N1"	N3/4N1 1/4	N3/4N1 1/2	N3/4N2	N3/4N2 1/2	N3/4N3	
NPT1"	-	-	-	-	N1N1"	N1N1 1/4	N1N1 1/2	N1N2	N1N2 1/2	N1N3	
NPT1 1/4"	-	-	-	-	-	N1 1/4N1 1/4	N1 1/4N1 1/2	N1 1/4N2	N1 1/4N2 1/2	N1 1/4N3	
NPT1 1/2"	-	-	-	-	-	-	N1 1/2N1 1/2	N1 1/2N2	N1 1/2N2 1/2	N1 1/2N3	
NPT2"	-	-	-	-	-	-	-	N2N2	N2N2 1/2	N2N3	
NPT2 1/2"	-	-	-	-	-	-	-	-	N2 1/2N2 1/2	N2 1/2N3	
NPT3"	-	-	-	-	-	-	-	-	-	N3N3	

See the code in the references table and find the sizes in the dimensions table.

DIMENSIONS ENLARGER EX D/E (mm)					
CODE	CH	E	L	V	H
M12M12 • N1/4N1/4 • N3/8N1/4	20	22	15	15	33
M12M16 • M16M16 • N1/4N3/8 • N3/8N3/8	24	26,4	15	15	33
M12M20 • M16M20 • M20M20	26	28,6	15	15	33
M12M25 • M16M25 • M20M25 • M20M25	32	35	15	15	33
M12M32 • M16M32 • M20M32 • M25M32 • M32M32	40	44	15	45	33
M12M40 • M16M40 • M20M40 • M25M40 • M32M40 • M40M40	45	49,5	15	15	33
M12M50 • M16M50 • M20M50 • M25M50 • M32M50 • M40M50 • M50M50	55	60	15	15	33
M12M63 • M16M63 • M20M63 • M25M63 • M32M63 • M40M63 • M50M63 • M63M63	-	70	15	15	33
M12M75 • M16M75 • M20M75 • M25M75 • M32M75 • M40M75 • M50M75 • M63M75	-	85	15	20	38
M12M90 • M16M90 • M20M90 • M25M90 • M32M90 • M40M90 • M50M90 • M63M90	-	100	15	20	38
M75M75	-	85	20	20	43
M75M90 • M90M90	-	100	20	20	43
N1/2N3/8	24	26,4	18	15	36
N1/4N1/2 • N3/8N1/2	26	28,6	15	18	36
N1/2N1/2	26	28,6	18	18	39
N1/4N3/4 • N3/8N3/4	32	35	15	18	36
N1/4N1 • N3/8N1	40	44	15	22	40

DIMENSIONS ENLARGER EX D/E (mm)					
CODE	CH	E	L	V	H
N1/4N1 1/4 • N3/8N1 1/4	50	55	15	22	40
N1/4N1 1/2 • N3/8N1 1/2	55	60	15	24	42
N1/4N2 • N3/8N2	-	70	15	24	42
N1/4N2 1/2 • N3/8N2 1/2	-	80	15	28	46
N1/4N3 • N3/8N3	-	95	15	28	46
N1/2N1/2	26	28,6	18	18	39
N1/2N3/4 • N3/4N3/4	32	35	18	18	39
N1/2N1 • N3/4N1	40	44	18	22	43
N1/2N1 1/4 • N3/4N1 1/4	50	55	18	22	43
N1/2N1 1/2 • N3/4N1 1/2	55	60	18	24	45
N1/2N2 • N3/4N2	-	70	18	24	45
N1/2N2 1/2 • N3/4N2 1/2	-	80	18	28	49
N1/2N3 • N3/4N3	-	95	18	28	49
N1N1	40	44	22	22	47
N1N1 1/4 • N1 1/4N1 1/4	50	55	22	22	47
N1N1 1/2 • N1 1/4N1 1/2	55	60	22	24	49
N1N2 • N1 1/4N2	-	70	22	24	49
N1N2 1/2 • N1 1/4N2 1/2	-	80	22	28	52
N1N3 • N1 1/4N3	-	95	22	28	53
N1 1/2N1 1/2	55	60	24	24	51
N1 1/2N2 • N2N2	-	70	24	24	51
N1 1/2N2 1/2 • N2N2 1/2	-	80	24	28	55
N1 1/2N3 • N2N3	-	85	24	28	55
N2 1/2N2 1/2	-	80	28	28	59
N2 1/2N3 • N3N3	-	95	28	28	59


Available upon request

# VALVE IP66

## AUTOMATIC BREATHER AND DRAINAGE HAZARDOUS AREA VALVES ATEX IP66




- Valves are suitable to be used on increased safety, intrinsically safety or watertight enclosures to facilitate the elimination of condensation or vapors developed inside. We recommended minimum 2 units per enclosure
- Material: stainless steel AISI316 o Nickel-plated brass
- Internal filter: stainless steel
- Gaskets: silicone
- Internal seeger: stainless steel
- Ultraviolet (UV) resistance
- Normative and marking:
  - o II 2GD Ex eb IIC Gb
  - o Ex tb IIIC Db
  - o EN 60079-14
  - o IEC 60079-0: 2011 / 60079-7:2015 / IEC 60079-31: 2013
  - o Directive 2014/34/UE
  - o EN 60079-0: 2012 / 60079-7: 2015 / 60079-31: 2014
- Protection class: IP66

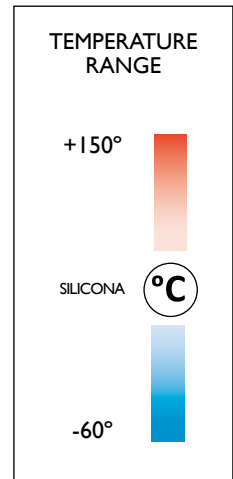

### HOW VALVE WORKS

IP66 Waterproof Anti-condensation valve to facilitate air circulation by convection inside the modules, preventing the formation of condensation. Pressure differences in enclosures with a high degree of protection from moisture and dust, are the result of fluctuations in internal and external temperature. If negative pressure or vacuum dust and moisture can be absorbed by the sealed doors and can enter the hazardous area enclosure. Because moisture can not escape, condensation can occur. Allows to regulate the pressure to prevent condensation following an increase in the internal temperature.

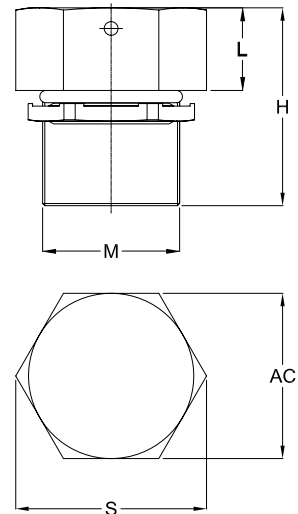

REFERENCES AUTOMATIC BREATHER AND DRAINAGE HAZARDOUS AREA VALVES ATEX

REFERENCES	USE	MATERIAL	DIMENSIONS (mm)					MINIMUM
			M	AC	S	H	L	
MVVAC04B.M20.S6.EX	Breather	Stainless steel	M20x1,5	24	28	26	12	20
MVVAC04D.M20.S6.EX	Drainage	Stainless steel	M20x1,5	24	28	26	12	20
MVVAC04B.M20.ON.EX	Breather	Latón niquelado	M20x1,5	24	28	26	12	50
MVVAC04D.M20.ON.EX	Drainage	Stainless steel	M20x1,5	24	28	26	12	50



# ACCESSORIES

## SHROUD IP66 - IP68



- Material:
  - TPV
  - PVC
  - LSF
- Ultraviolet (UV) resistance
- Protection class: IP66 / IP68 (EN 60529)
- Temperature range: -20°C to +80°C

Reference configuration. Example: MVSHR16LSF

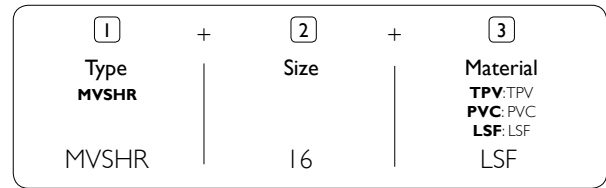

REFERENCES SHROUD				
SHROUD	SIZE	ØD (mm)	H (mm)	L (mm)
MVSHR	16	25	100	60
MVSHR	20	32	110	65
MVSHR	25	41	130	70
MVSHR	32	49	145	77
MVSHR	40	60	170	85
MVSHR	50S	65	155	86
MVSHR	50	75	175	92
MVSHR	63S	81	180	92
MVSHR	63	86	180	92
MVSHR	75S	100	220	115
MVSHR	75	110	220	115


Available upon request

## EARTH TAG



- Material:
  - Nickel-plated brass
  - Stainless steel AISI303L
- Ultraviolet (UV) resistance
- Temperature range: -40°C to +100°C

Reference configuration. Example: MVTTI6ON

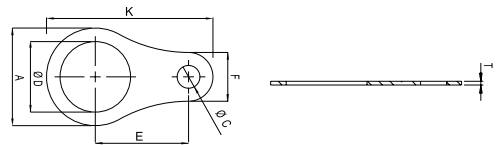

REFERENCES EARTH TAG								
EARTH TAG	SIZE	A (mm)	ØD (mm)	ØC (mm)	F (mm)	K (mm)	E (mm)	T (mm)
MVTT	16	25,4	16,5	6,5	12,5	49	30	1
MVTT	20	27	20,5	6,5	10,2	51,6	33	1
MVTT	25	35	25,5	6,5	13,5	60	35,5	1
MVTT	32	45	32,5	10,5	22,5	76,75	43	1
MVTT	40	53,5	40,5	10,5	23,6	83,5	45	1
MVTT	50	65	50,5	10,5	29,5	105,25	58	1
MVTT	63	82	63,5	10,5	29,5	122,75	67	1
MVTT	75	96	75,5	6,5	24	-	73	1,5
MVTT	90	114	90,5	6,5	37	-	86	1,5

Available upon request

CABLE GLANDS

**GLAKOR**<sup>®</sup>

INTELLIGENT CABLE GLANDS





INTELLIGENT CABLE GLANDS

Glakor a division of DelValle Global Solutions S.L.U.



Paso del Prao, 6. 01320 Oyón (Álava). Spain  
+34 945 601 381

comercial@glakor.com | [www.cableglandsfast.com](http://www.cableglandsfast.com) | [www.glakor.com](http://www.glakor.com)

Contact us, we will be available at any time